




FIX R ... M

Druckregler für Druckluft, neutrale Gase, mit Manometer, Zink-Druckguss (BG5 – Aluminium), Eingangsdruck max. 16 bar, Temperatur -10 bis +60°C

Typ	Gewinde	l/min	Regel- bereich bar	Manometer Anzeige bar	Größe	A	B	Artikel-Nr.
FIX R0 18 10 M	G 1/8"	1450	0,5 - 10,0	0 - 16,0	BG 0	40,0	82,0	200001693
FIX R0 14 10 M	G 1/4"							200001694
FIX R1 14 10 M		2100			BG 1	48,0	94,0	200001695
FIX R1 38 10 M	G 3/8"							200001696
FIX R3 12 10 M	G 1/2"	8700			BG 3	69,0	134,0	100168506
FIX R3 34 10 M	G 3/4"							200001697
FIX R5 34 10 M		17500			BG 5	100,0	180,0	200001698
FIX R5 10 10 M	G 1"							200001699

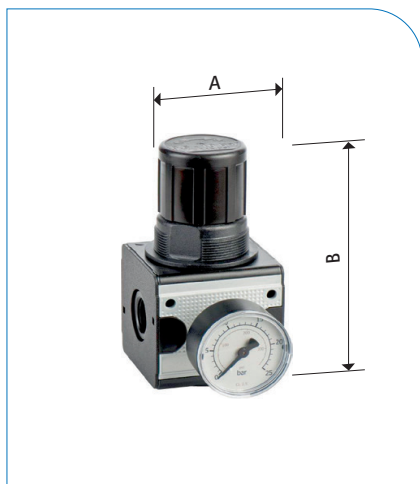

FIX C ... M

Filterregler für Druckluft, neutrale Gase, mit Manometer, Zink-Druckguss (BG5 – Aluminium), Eingangsdruck max. 16 bar, Temperatur -10 bis +60°C, Filterfeinheit 5µm (BG5 40µm), Kondensat-Entleerung halbautomatisch

Typ	Gewinde	l/min	Regel- bereich bar	Manometer Anzeige bar	Größe	A	B	Artikel-Nr.
FIX C0 18 10 M	G 1/8"	1450	0,5 - 10,0	0 - 16,0	BG 0	40,0	163,0	200001684
FIX C0 14 10 M	G 1/4"							200001685
FIX C1 14 10 M		1600			BG 1	48,0	192,0	200001686
FIX C1 38 10 M	G 3/8"							200001687
FIX C3 12 10 M	G 1/2"	6700			BG 3	69,0	246,0	200001688
FIX C3 34 10 M	G 3/4"							200001689
FIX C5 34 10 M		1500			BG 5	100,0	382,0	100197391
FIX C5 10 10 M	G 1"							200001690



FIX CL ... M

Wartungseinheit 2-teilig für Druckluft, neutrale Gase, mit Manometer, Zink-Druckguss (BG5 – Aluminium), Eingangsdruck max. 16 bar, max. 12 bar bei BG 0, Temperatur -10 bis +60°C, Filterfeinheit 5µm (BG5 40µm), Kondensat-Entleerung halbautomatisch, Micronebelöler BG0, Porportionalöler BG1,3 und 5

Typ	Gewinde	l/min	Regel- bereich bar	Manometer Anzeige bar	Größe	A	B	Artikel-Nr.
FIX CLO 18 10 M	G 1/8"	700	0,5 - 10,0	0 - 16,0	BG 0	80,0	163,0	200001654
FIX CLO 14 10 M	G 1/4"							200001655
FIX CL1 14 10 M		1200			BG 1	93,0	192,0	200001635
FIX CL1 38 10 M	G 3/8"							200001632
FIX CL3 12 10 M	G 1/2"	5800			BG 3	135,0	246,0	200001636
FIX CL3 34 10 M	G 3/4"							200001656
FIX CL5 34 10 M		13500			BG 5	200,0	382,0	200001657
FIX CL5 10 10 M	G 1"							200001658